


choetech

User Manual 50000mAh Power Bank

Model: B664

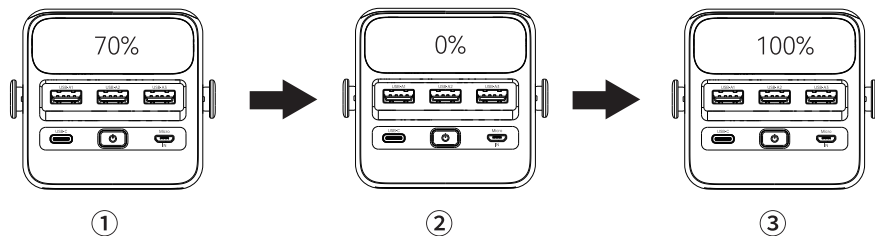

EN: Product Display Activation Reminder

It's recommended that when using this product for the first time①, please use it normally until the battery level shows zero②. Then charge the product to 100% to complete the screen display activation③. Subsequently, you can use it normally. Failure to complete the screen display activation as instructed may lead to inaccurate display.

Note: During the process of charging to 100% for screen display activation, do not power off or unplug the charging cable.

Package List

1 x 50000mAh Power Bank, 1 x Use Manual


Specifications

Battery Capacity	50000mAh (185Wh)
USB-C Input	5V $\overline{=}$ 3A, 9V $\overline{=}$ 3A, 12V $\overline{=}$ 3A, 15V $\overline{=}$ 3A, 20V $\overline{=}$ 3.25A (65W Max)
Micro Input	5V $\overline{=}$ 2A, 9V $\overline{=}$ 2A, 12V $\overline{=}$ 1.5A (18W Max)
USB-C Output	5V $\overline{=}$ 3A, 9V $\overline{=}$ 3A, 12V $\overline{=}$ 3A, 15V $\overline{=}$ 3A, 20V $\overline{=}$ 3.25A (65W Max)
USB-A1 Output	5V $\overline{=}$ 3.4A
USB-A2/USB-A3 Output	5V $\overline{=}$ 3A, 5V $\overline{=}$ 4.5A, 4.5V $\overline{=}$ 5A, 9V $\overline{=}$ 2A, 12V $\overline{=}$ 1.5A (22.5W Max)
USB-C+USB-A1+USB-A2+USB-A3	5V $\overline{=}$ 4A (20W Max)
Total Output	65W (Max)
Lights	Three Gears

Product Diagram

- ① Power Button
- ② Power Display
- ③ USB Output 1: 5V/3.4A
- ④ USB Output 2: Support 22.5W super fast charge
- ⑤ USB Output 3: Support 22.5W super fast charge
- ⑥ USB-C: 65W Input/65W Output
- ⑦ Micro: 18W Input
- ⑧ LED Searchlight


Note: Double port or four port output is 5V/4A.

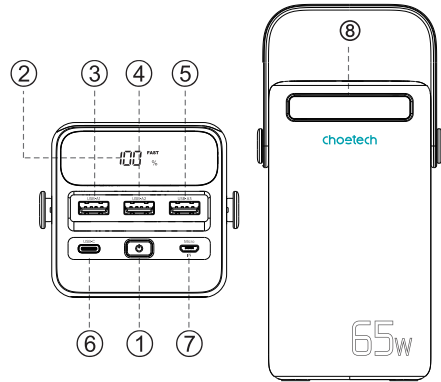


Battery Indicator Instructions

1. Charging display (display of electric quantity when charging the mobile power supply with external standby power supply) :
The digital tube indicates the current electric quantity by increasing the electric quantity by 0% to 100%, and the percentage will blink when charging, and it will stop flashing and turn on when reaching 100%.
2. Discharge display (use mobile power to charge or power devices such as mobile phones and tablet computers) :
The digital tube indicates the current electric quantity by decreasing the electric quantity by 100%-0%, and the percentage will blink when the electric quantity is low.
3. Quick charging status display:
When charging the mobile power supply (or mobile phone), if the current charging state is fast, the display screen will light up "FAST".

Charge the power bank

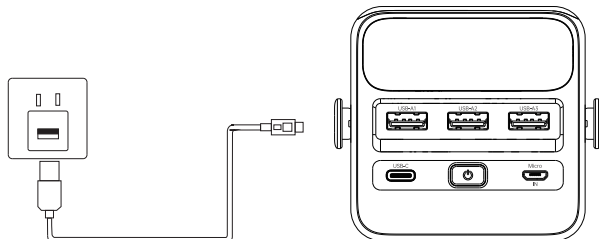

Power bank charge to mobile phones and tablets

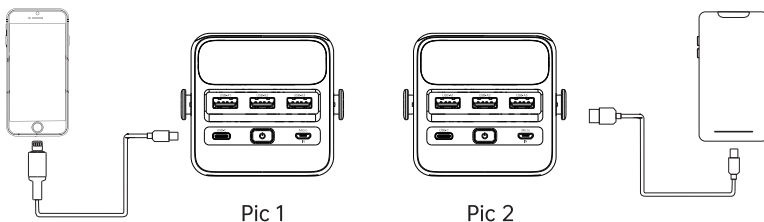

Precautions and Safety Warnings

- Please fully charge the product for the first time.
- When charging this product or using this product to charge other devices, please select the appropriate charger and USB cable by yourself.
- Make sure someone is present when charging this product, and unplug the power when you are out or leave for a long time.
- When the product is fully charged, or when the product is fully charged to other devices, please unplug the cable in time to avoid the loss in the connected state for a long time.
- If there is no power indication after pressing the button, the product may be in a protected state.
- When the product is not used for a long time, please keep the power of the product in the range of 25%-50% and store it in a cool and dry environment. Avoid storing the product for a long time in a fully charged or uncharged state to prolong the battery life.
- When using this product, it is recommended to use it within the ambient temperature of 5°C~30°C.


Improper use may lead to battery failure; serious heating, even fire and explosion! To avoid harm to you and your property, please strictly follow the requirements to store and use this product:

- Be sure to use a charger that meets local safety standards (such as China 3C certification standards) to charge this product to prevent electric shock or damage to the battery.
- Do not press or knock the product heavily and avoid serious drops or strong shocks to the product. If these happen, or if liquid penetrates/spills inside the product, it may cause damage to the battery, circuit or short circuit, please stop using it immediately and dispose of it properly.
- If the product is bulging, deformed, leaking, or has a significant decrease in capacity, stop using it immediately and dispose of it properly.
- Do not place this product in a pocket of clothes or pants, in a closed bag, on a bed or sofa, etc. where it may affect its heat dissipation. Make sure that this product is not covered by clothes, pillows, bedding or other miscellaneous objects when charging other devices such as cell phones for a long time, and do not stack this product with other devices such as cell phones to ensure good heat dissipation of cell phones and other devices.
- It is strictly prohibited to disassemble, squeeze, puncture, short-circuit the product or put it into water or fire (including near heat sources such as stoves and heaters) or expose it to temperatures higher than 60°C(140°F). In hot weather, do not leave this product outside in an unoccupied car or in other sunny places.
- This product contains lithium batteries, it is strictly forbidden to disassemble the shell of the product to avoid battery breakage or other dangers.

Producent: DAK TECHNOLOGY CO., LIMITED

Adres: 3-4/F, budynek D, De Mei Industrial center, Donghuan Second Road, Longhua New District, Shenzhen, Chiny

For FAQs and More Information, Please Visit:

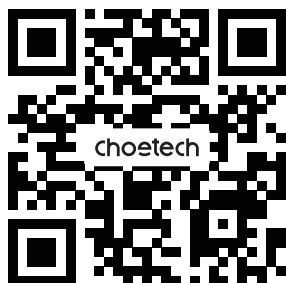

choetech/support



www.choetech.com



support@choetech.com



b2b@choetech.com



<http://www.facebook.com/choetechofficial>



<http://www.twitter.com/CHOETECH>

FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

Warranty

Zapewnienie jakości | Garantie de qualité | Minőségbiztosítás |

品质保证 | 품질보증 | 品質保証 | ضمان الجودة



24-Month Warranty

24 miesięczne gwarancji

Période de garantie de 24 mois

24 hónapos garanciaidő

24个月质保期

품질 보증 기간 24개 월

24ヶ月保証

ضمان لمدة 24 شهرا



Lifetime Technical Support

Dożywotnie wsparcie techniczne

Soutien technique permanent

Egész életen át tartó technikai támogatás

终身技术支持

평생 기술 지원

生涯テクニカルサポート

دعم فني مدى الحياة